



Variofix upper section Kessel des cov, 304 SST, Lock&Lift, L15

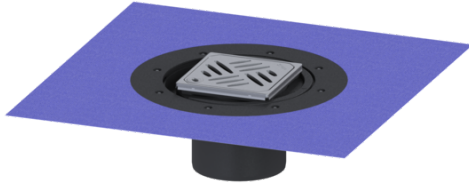

Article information

Item no.: 48904
 GTIN: 4026092028841
 Price group: 10

Advantages

- Different covers selectable
- Including waterproofing membrane

Description

Used in combination with a drain body of the KESSEL modular system, the upper section is suitable for indoor point drainage.

Variant

System:

125

Seal:

Lip seal

Waterproofing layer on the upper section:

Enclosed sealing collar to be glued (bd) according to DIN 18534

Water exposure class in accordance to DIN 18534-1 (up to and including):

W3-I

General characteristics

ATEX:

no

Dimensions

Vertical adjustment:

10 - 23 mm

Net weight:

1,55 kg

Gross weight:

1,77 kg

Diameter:

312 mm

Type of height adjustability:

vertically adjustable upper section

Height:

120 mm

Packaging dimension:

length

Packaging dimension:

width

Packaging dimension:

height

Coverage features

Type of cover:	Design cover
Cover material:	Stainless steel 14301
Colour of cover:	silver
Frame material:	Stainless steel 14301
Locking:	Lock & Lift
Load class:	L 15 (EN 1253-1)
Grating design:	Kessel
Slip resistance class:	R9 according to DIN 51130; C according to DIN 51097
Rim width:	132 mm
Rim length:	132 mm
Upper section:	adjustable in three dimensions
Shape of upper section:	square
Upper section material:	ABS